KREBE

WASHING MACHINE PCF-452
Dimensions sheme

TIPPO

2017

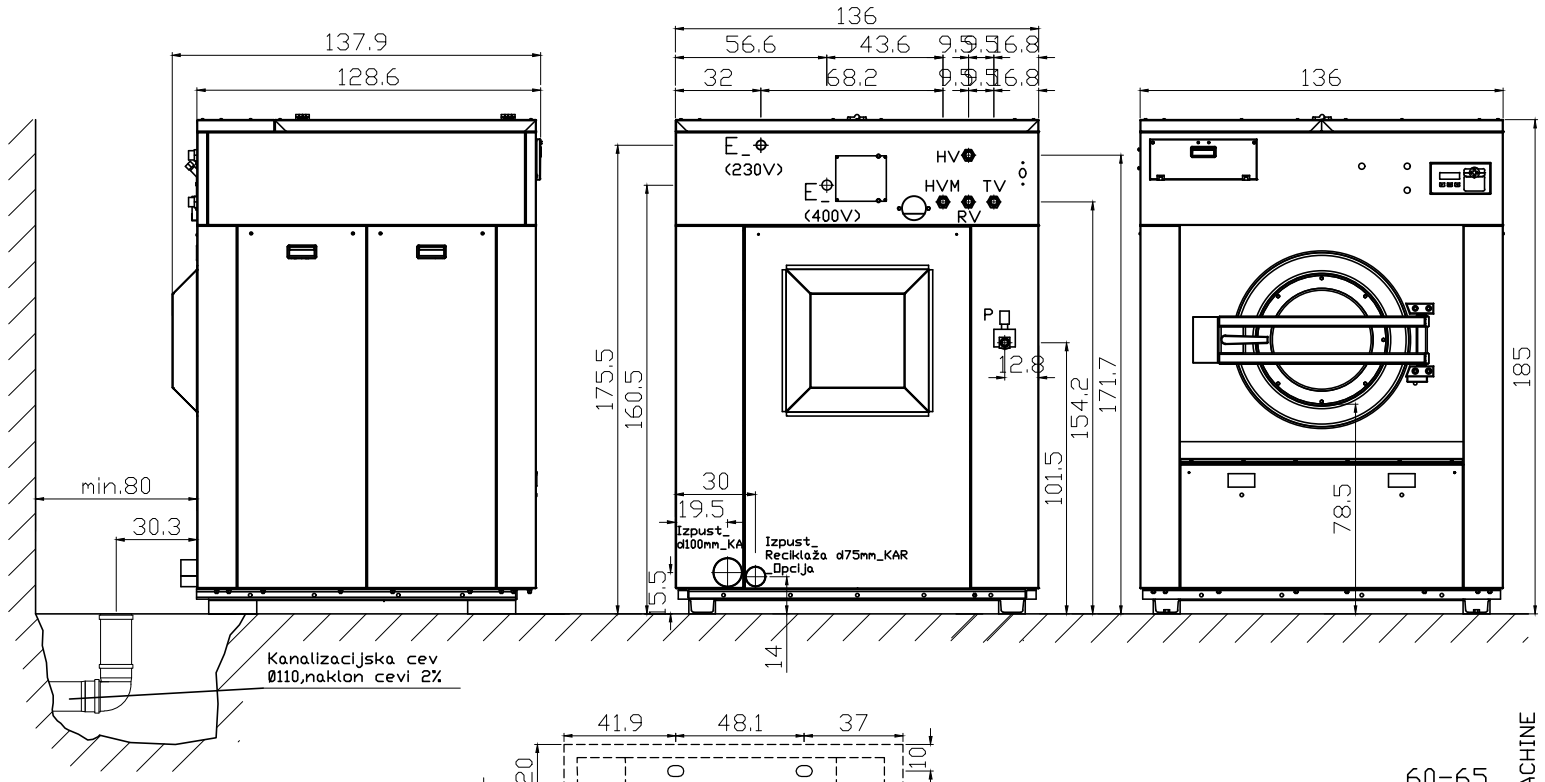

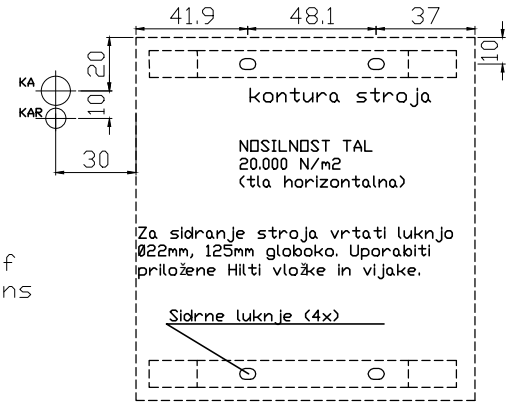

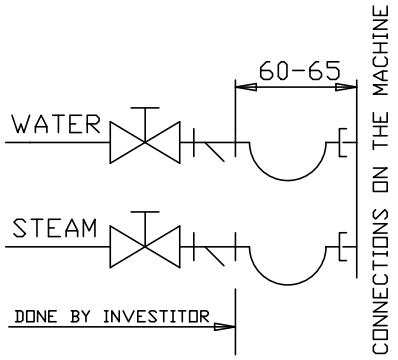

Remarks:
If you use added basement of high of 20cm, all high dimensions will be higher for this value.

El.connections over GS switch.
Leave the lenght of el.cable longer than 2m.

Dimensions in cm!

TEHN. CHARASTERISTICS / Type of the machine	Units	PCF-452-Pv	PCF-452-Pn	PCF-452-E	PCF-452-K
CAPACITY	kg/full.	45			
DIMENSIONS	mm	1360 x 1380 x 1850			
WEIGHT	kg	1450			
G-faktor		452			
REST HUMIDITY	%	~46			
CONNECTIONS:cold water -HV	DN (col)	25 (1)			
warm water 75°C-TV		25 (1)			
cold water-soft -HVM		25 (1) - option			
water from recycling system-RV		25 (1) - option			
steam (direct) -P		20 (3/4)	40 (6/4)		Pv or Pn
CANALISATION -KA	mm	110			
CANALISATION Recycling -KAR	mm	75_Option			
EL.CONNECTION POWER	kW	7,6		43,6 / 34,6_Option	
EL.CONNECTION 400V/3NAC/50Hz -E	mm2Cu	5x4		5x16	
PROTECTION	A	35		63	
EL.CONNECTION 230V/3AC/50Hz -E	mm2Cu	4x6		4x35 / 4x25	
PROTECTION	A	50		125 / 100	
CONNECT.HEAT.POWER: steam	kW	80			80
electric	kW			36 / 27_Option	
water	l/s	1			
PRESSURE ON INLETS: water	bar	3 - 6			
steam		3 - 8	0.3 - 0.5		Pv or Pn