


KREBE

WASHING MACHINE PCF-251


Dimensions sheme

TIPPO

2017

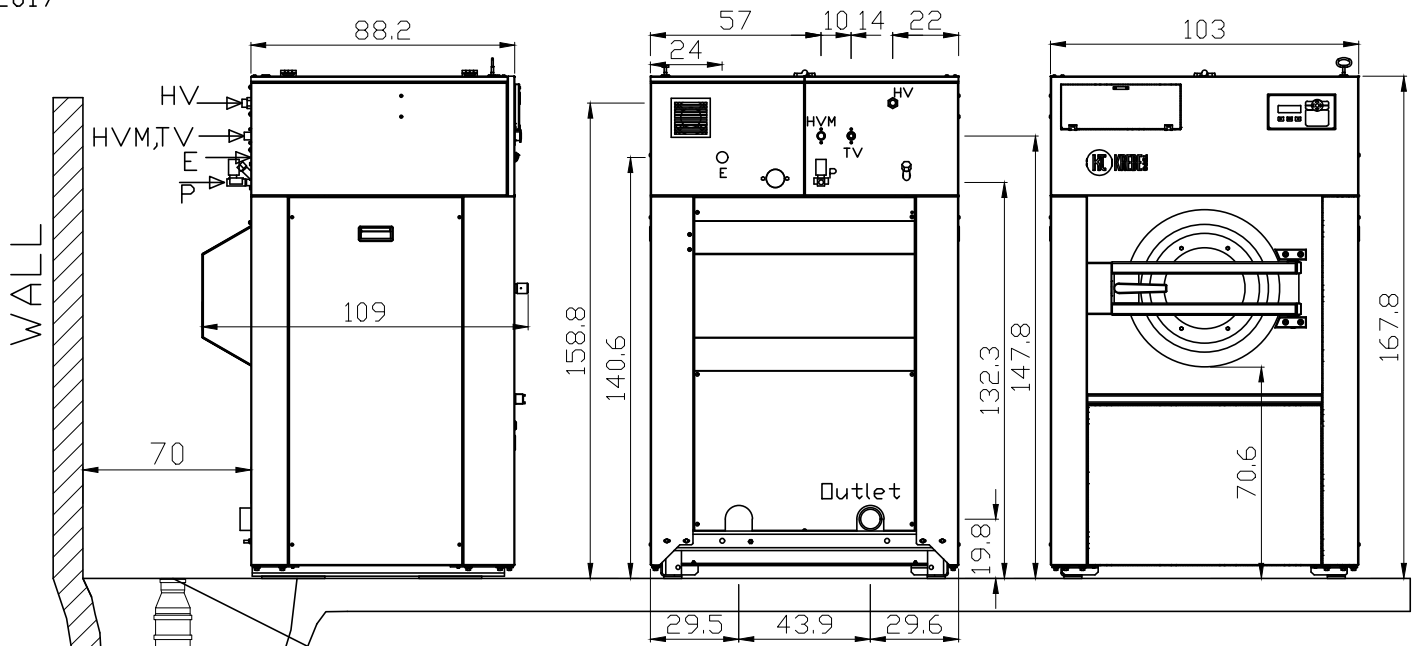

Canalization tube $\varnothing 75$
 Canalization tube must to have air trap!

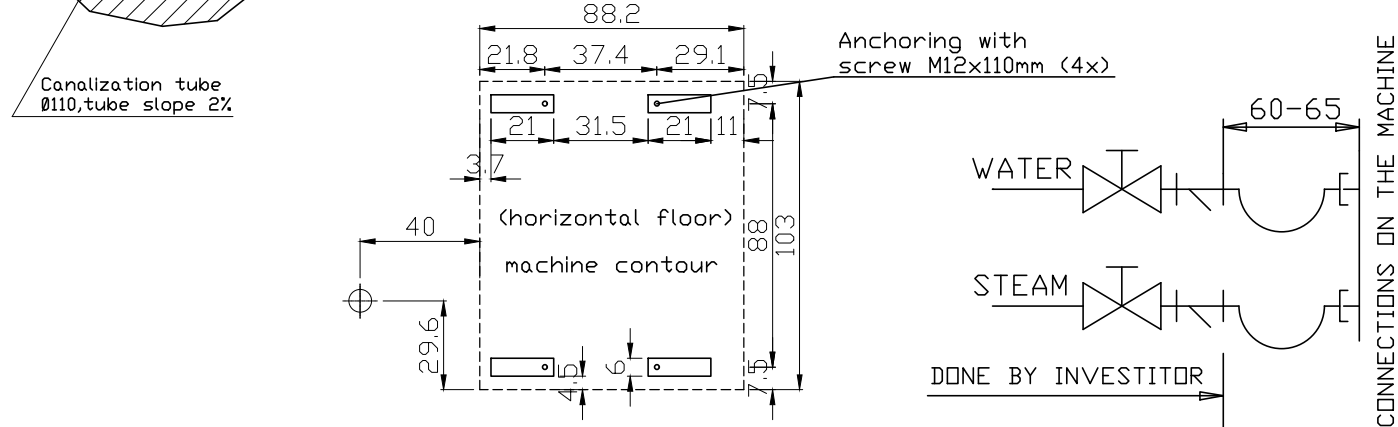

El.connections over GS switch.
 Leave the lenght of el.cable longer than 1 m.

Dimensions in cm!

TEHN. CHARACTERISTICS	Type of the machine		Units	PCF-251-Pv	PCF-251-Pn	PCF-251-E	PCF-251-K
	CAPACITY		kg/fill.				25
DIMENSIONS		mm			1030 × 1090 × 1678		
WEIGHT		kg			740		
G-faktor					450		
REST HUMIDITY		%			~46		
CONNECTIONS:	cold water -HV warm water 45C-TV cold water-soft -HVM steam (direct) -P	DN (col)		20 (3/4)	20 (3/4) 20 (3/4) - option		Pv or Pn
CANALISATION	-KA	mm			110		
EL.CONNECTION CABLE	-E	mm ² Cu		5x2,5		5x6	
EL.CONNECTION POWER PROTECTION TENSION		kW A		4,1 25		28,1 (option_22,1) 50 (option_35)	
CONNECT.HEAT.POWER:	steam electric water	kW kW l/s		40		1	40 24 (option_18)
PRESSURE ON INLETS:	water steam	bar		3 - 8	0.3 - 0.5	3 - 6	Pv or Pn