


KREBE

WASHING MACHINE PCH-262
Dimensions scheme

TIPPO

2019

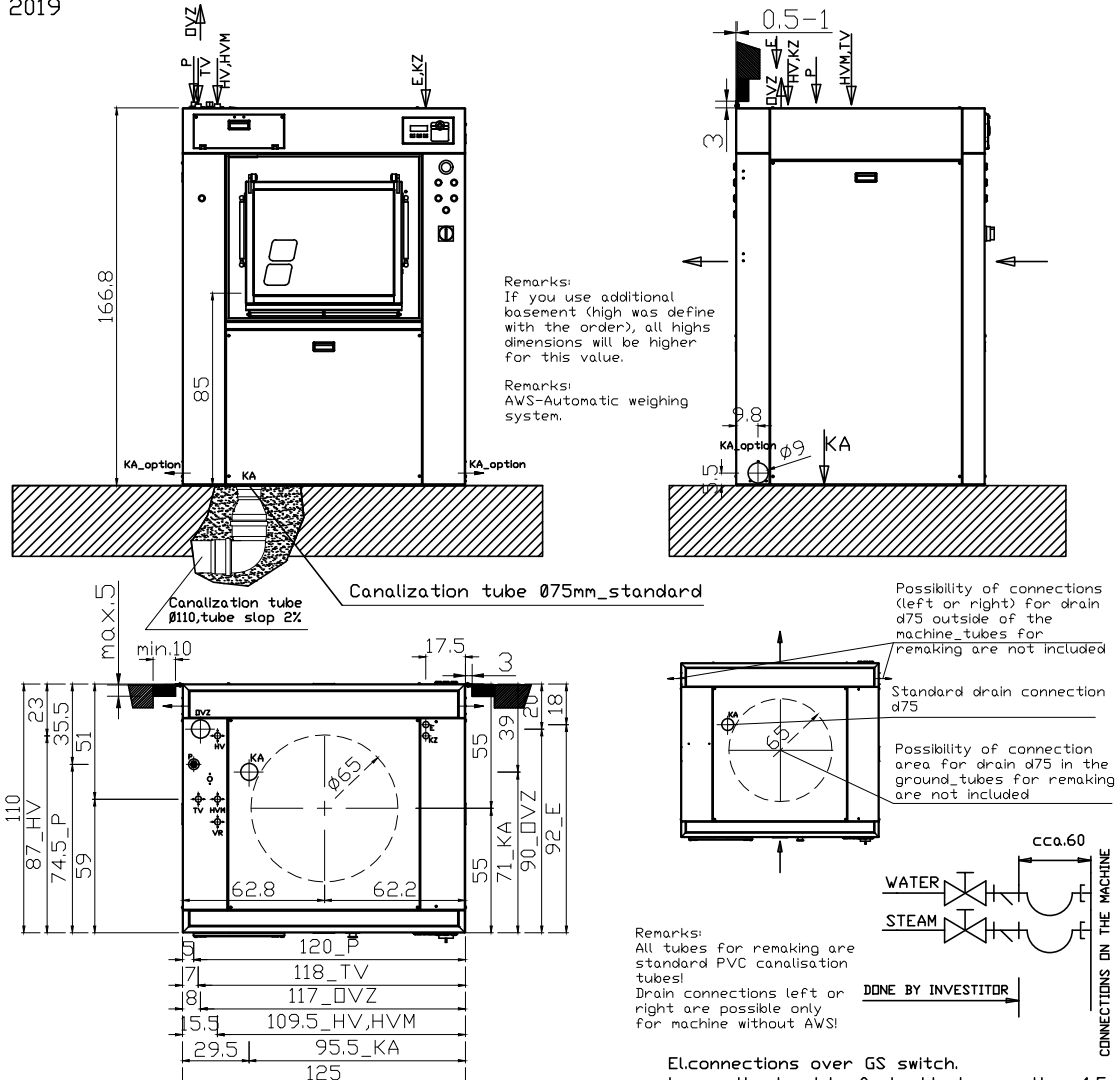

Dimensions in cm!

TEHN. CHARACTERISTICS	Type of the machine	Units	PCH-262			
			(steam heating)	(steam heating)	(electric heating)	(combined heating)
CAPACITY 1:10		kg/fill.	26			
DIMENSIONS		mm	1250 x 1100 x 1668			
WEIGHT:net/gross		kg	775/795			
G-faktor	VR-4th water inlet_option		375			
CONNECTIONS:	cold water -HV hot water max.75°C -TV cold water-soft -HVM water recovery inlet_option-VR kompresed air -KZ steam (direct) -P	DN (col)	20 (3/4) 20 (3/4) 20 (3/4) 20 (3/4) 10 (3/8)			
air exhaust -DVZ		mm	75			
CANALISATION	-KA		76			
EL.CONNECTION POWER		kW	4,5		28,5	
TENSION			400V,3NAC,50Hz			
PROTECTION		A	20		50	
EL.CONNECTION CABLE	-E	mm ² Cu	5x2,5		5x6	
TENSION			220V,3AC,50Hz			
PROTECTION		A	20		80	
EL.CONNECTION CABLE	-E	mm ² Cu	4x2,5		4x16	
CONNECT.HEAT.POWER:	steam electric kompresed air water	kW kW l/s	50 ---		--- 24	
PRESSURE ON INLETS:	water kompresed air high(Pv)/low(Pn) press.steam	bar	2 - 6 6 - 10		---	
			3-8 (Pv)	0,3-0,5 (Pn)	---	Pv or Pn